

Alloy Steel Double-Ended Shear Beam

FEATURES

- Capacities 10k–75k lbs
- Low profile design for weigh bridge and silo applications
- Nickel plated alloy steel construction
- NTEP approved
- IP67 protection
- **Optional**
 - EEx ia IIC T6 hazardous area approval
 - FM approval available

APPLICATIONS

- Weigh bridges
- Tank and silo weighing

DESCRIPTION

Model 4158 is a double-ended shear beam load cell designed for high capacity silo weighing applications.


This high accuracy load cell is designed to meet NTEP standards. When combined with suitable mounting arrangements, this load cell will provide a simple, accurate and reliable weighing system.



Nickel plated and full environmental sealing assure long-term reliability. For hazardous environments, this load cell has a EEX ia IIC T6 approved option.

When used in conjunction with Tede-Huntleigh's custom designed mount, the unit combines ease of installation with both side load and lift-off protection.

OUTLINE DIMENSIONS in millimeters

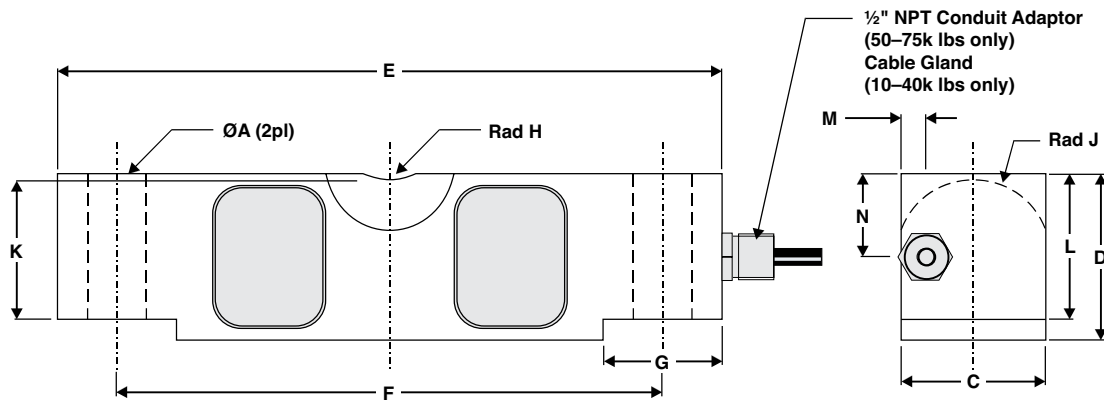

CAPACITY	ØA	C	D	E	F	G	RadH	Rad J	K	L	M	N
10–25k lbs	17.3	42.9	49.3	196.9	165.1	35.9	19.1	22.9	41.4	43.2	8.8	13.6
40k lbs	20.6	49.3	62.0	260.4	215.9	49.0	25.4	28.5	50.8	53.3	9.0	31.0
50–75k lbs	26.9	62.0	74.7	260.4	215.9	49.0	25.4	34.8	64.5	67.3	10.4	37.4


Alloy Steel Double-Ended Shear Beam

SPECIFICATIONS			
PARAMETER	VALUE		UNIT
Rated capacity – R.C. (E_{max})	10, 20, 25, 40, 50, 60, 75 ⁽¹⁾		Klbs
NTEP/OIML accuracy class	NTEP	Non-Approved	
Maximum no. of intervals (n)	10000 IIIIL	1000	
$Y = E_{max}/V_{min}$	12000	4000	Maximum available
Rated output – R.O.	3.0		mV/V
Rated output tolerance	0.075		±mV/V
Zero balance	0.09		±mV/V
Zero return, 30 min.	0.030	0.050	±% of applied load
Total error	0.30	0.050	±% of rated output
Temperature effect on zero	0.0013	0.0067	±% of rated output/°C
Temperature effect on output	0.0025	0.0040	±% of applied load/°C
Temperature range, compensated	-10 to 40		°C
Temperature range, safe	-30 to +70		°C
Maximum safe central overload	150		% of R.C.
Ultimate central overload	300		% of R.C.
Excitation, recommended	10		VDC or VAC RMS
Excitation, maximum	15		VDC or VAC RMS
Input impedance	780±20		Ω
Output impedance	705±5		Ω
Insulation resistance	>1000		MΩ
Cable length	7.5		m
Cable type	6-wire, braided, PVC, dual floating screen		Standard
Construction	Nickel-plated alloy steel		
Environmental protection	IP67		

⁽¹⁾10k lbs is not approved by NTEP

All specifications subject to change without notice.

Wiring Schematic Diagram



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.